


FLEXIROL CENTREFOLD

For heavyweight centre folding wooden partition doors weighing up to 125kg



Specifically developed for commercial applications requiring heavyweight, top hung, central folding wooden partition doors. Doors are hung centrally and can fold to one or both sides. For applications hinged to the jam 3.5, 5.5 or 7.5 doors can be used with the half door hinged to the jam. For best operation of floating units, 5, 7 or 9 doors should be used. Any access doors should be hinged separately to the jamb.

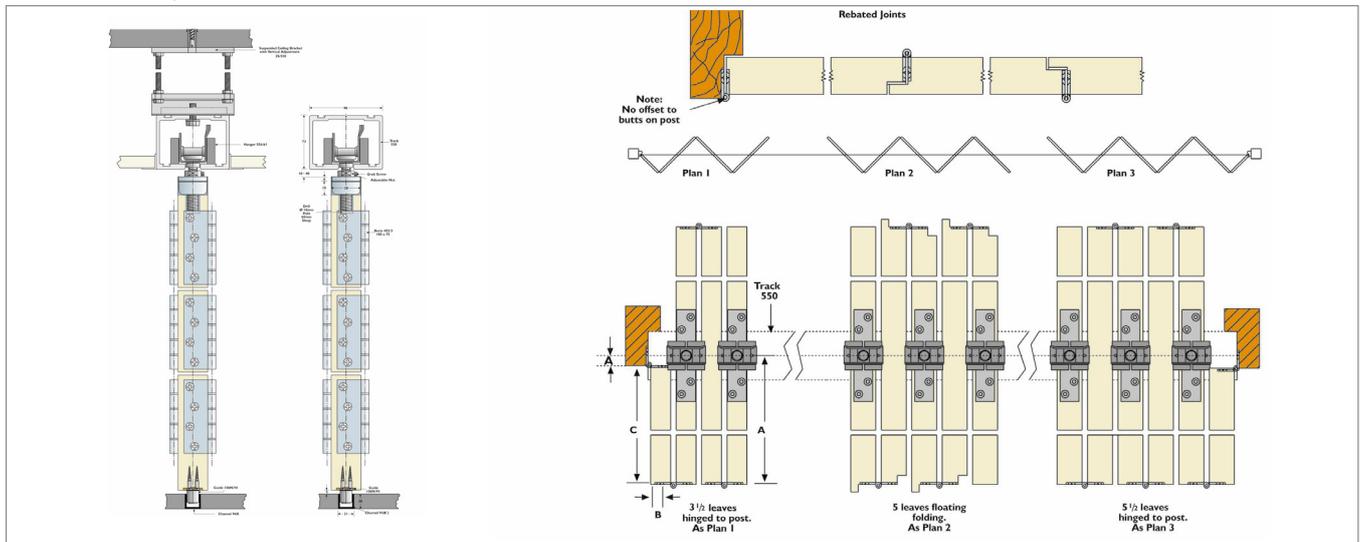

Product Information

Product	Max. Door Height	Max. Door Width	Door Thickness Range	Max. Door Weight
Flexirol Centrefold	4500mm	1200mm	43 - 57mm	125kg

Product Specification

Component	Description	Short Code
Track Equal to opening width	White aluminium track in 2000, 2500, 3000, 4000, 5000 and 6000mm lengths	550/****
	Aluminium mill finish track in 2000, 3000, 4000, 5000 and 6000mm lengths	550/****M
Brackets At 500mm intervals	Face fixed bracket	1A/550
	Soffit fixed bracket, adjustable	3S/550
Hangers	Top fixing plate hanger	556/61
Guides	Nylon roller guide	106N/94
Hinge	Butt hinge	403/3
Guide Channel	Brass guide channel in 1500 and 3000mm lengths	94/****
	Aluminium guide channel in 1500, 2000, 2500, 3000, 4000 and 6000mm lengths	94X/****
	Aluminium threshold in 2000, 2500, 3000, 3500, 4000 and 6000mm lengths	94T/****

**** Replace by length of track for full short code

Hardware

Track	Brackets	Hanger	Guide	Hinge	Guide Channel
550	550M	1A/550	3S/550	556/61	106N/94
					403/3
					94
					94X
					94T

Accessories [View our full range of accessories on page 136](#)