




FLEXIROL 135° MULTIDIRECTIONAL SYSTEM FOR GLASS DOORS

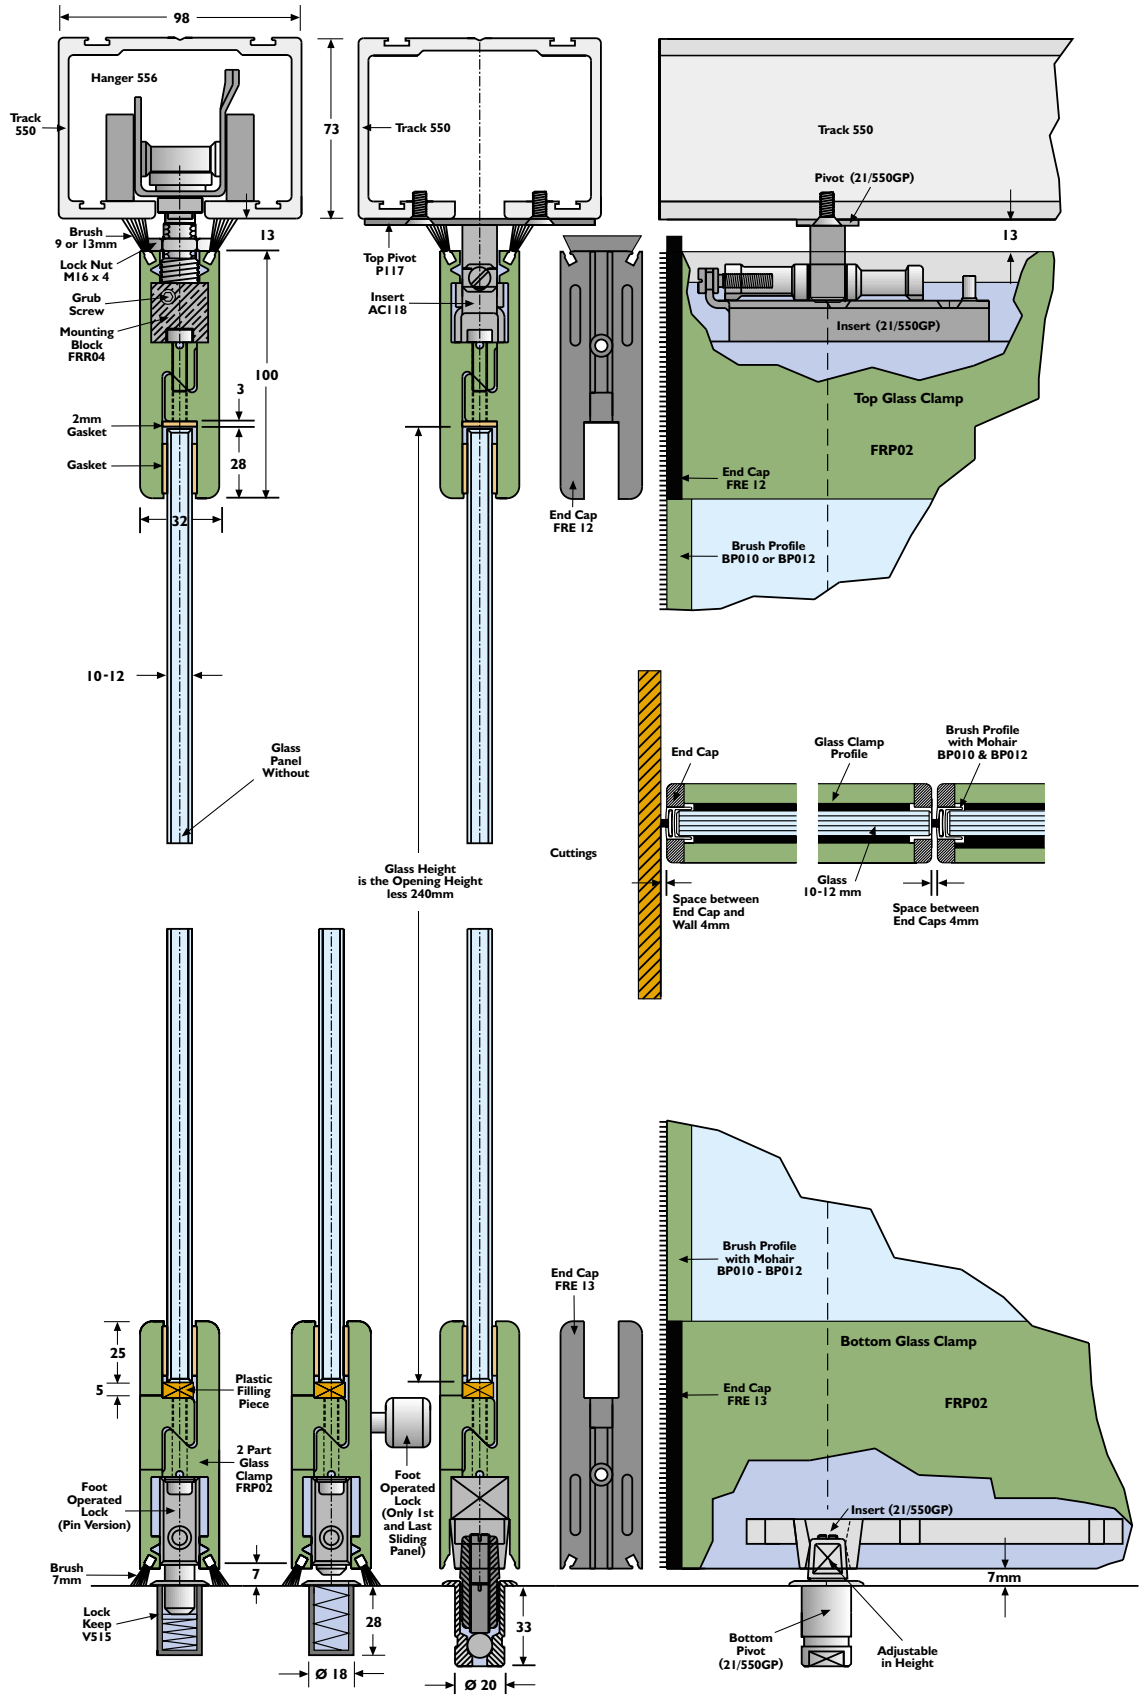

CAPACITY

Max. door weight:	500kg (2 hangers per leaf) 250kg (1 hanger per leaf)
Max. door height:	2800mm-10mm tempered glass 4000mm-12mm tempered glass
Max. door width:	1300mm-10mm tempered glass 1300mm-12mm tempered glass
Door thickness:	10 or 12 mm - tempered glass
Max. swing door width:	1200mm


APPLICATIONS

Multidirectional Flexirol is ideally suited to hotels, conference centres, shop-fronts, showrooms, any site that requires high performance and the flexibility of 135° movement.

DOOR TYPES

Tempered glass panels of 10 or 12mm thickness.
Use of laminated glass panels is also possible.

Note: when using glass clamps in combination with protective coatings for glass surfaces such as Clear Shield, ensure that the glass surface to be clamped is not treated with the Clear Shield coating.

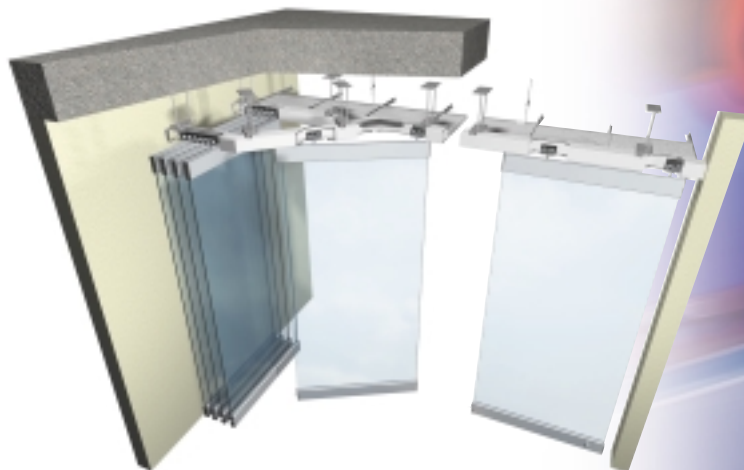

TECHNICAL INFORMATION

Track:	550 (extruded aluminium)	
Brackets:	Face fix	1A/550
	Soffit fix	3S/550
Glass Profiles:	Top/bottom glass profile	FRP02
	Swing/slide profile	FRP01
Pivots:	Glass pivot set	21/550GP
Accessories:	Track stop	HH3/301
	Door closers	Floor spring closer 7410
		Transom closer 5600
		(complete with 400mm of 550 track)
		Swing/sliding floor spring 7305
	Handle sets	H22/200 D - handle 22mm dia. 200mm long
		H22/300 D - handle 22mm dia. 300mm long
		H33/220 D - handle 33mm dia. 220mm long
		H33/300 D - handle 33mm dia. 300mm long
		(Standard handle set finishes are silver anodised and white RAL9010. Other finishes are available on request.)



FLEXIROL 135°

MULTIDIRECTIONAL

SYSTEM FOR GLASS DOORS

