


FLEXIROL 90°

MULTIDIRECTIONAL

SYSTEM FOR GLASS DOORS

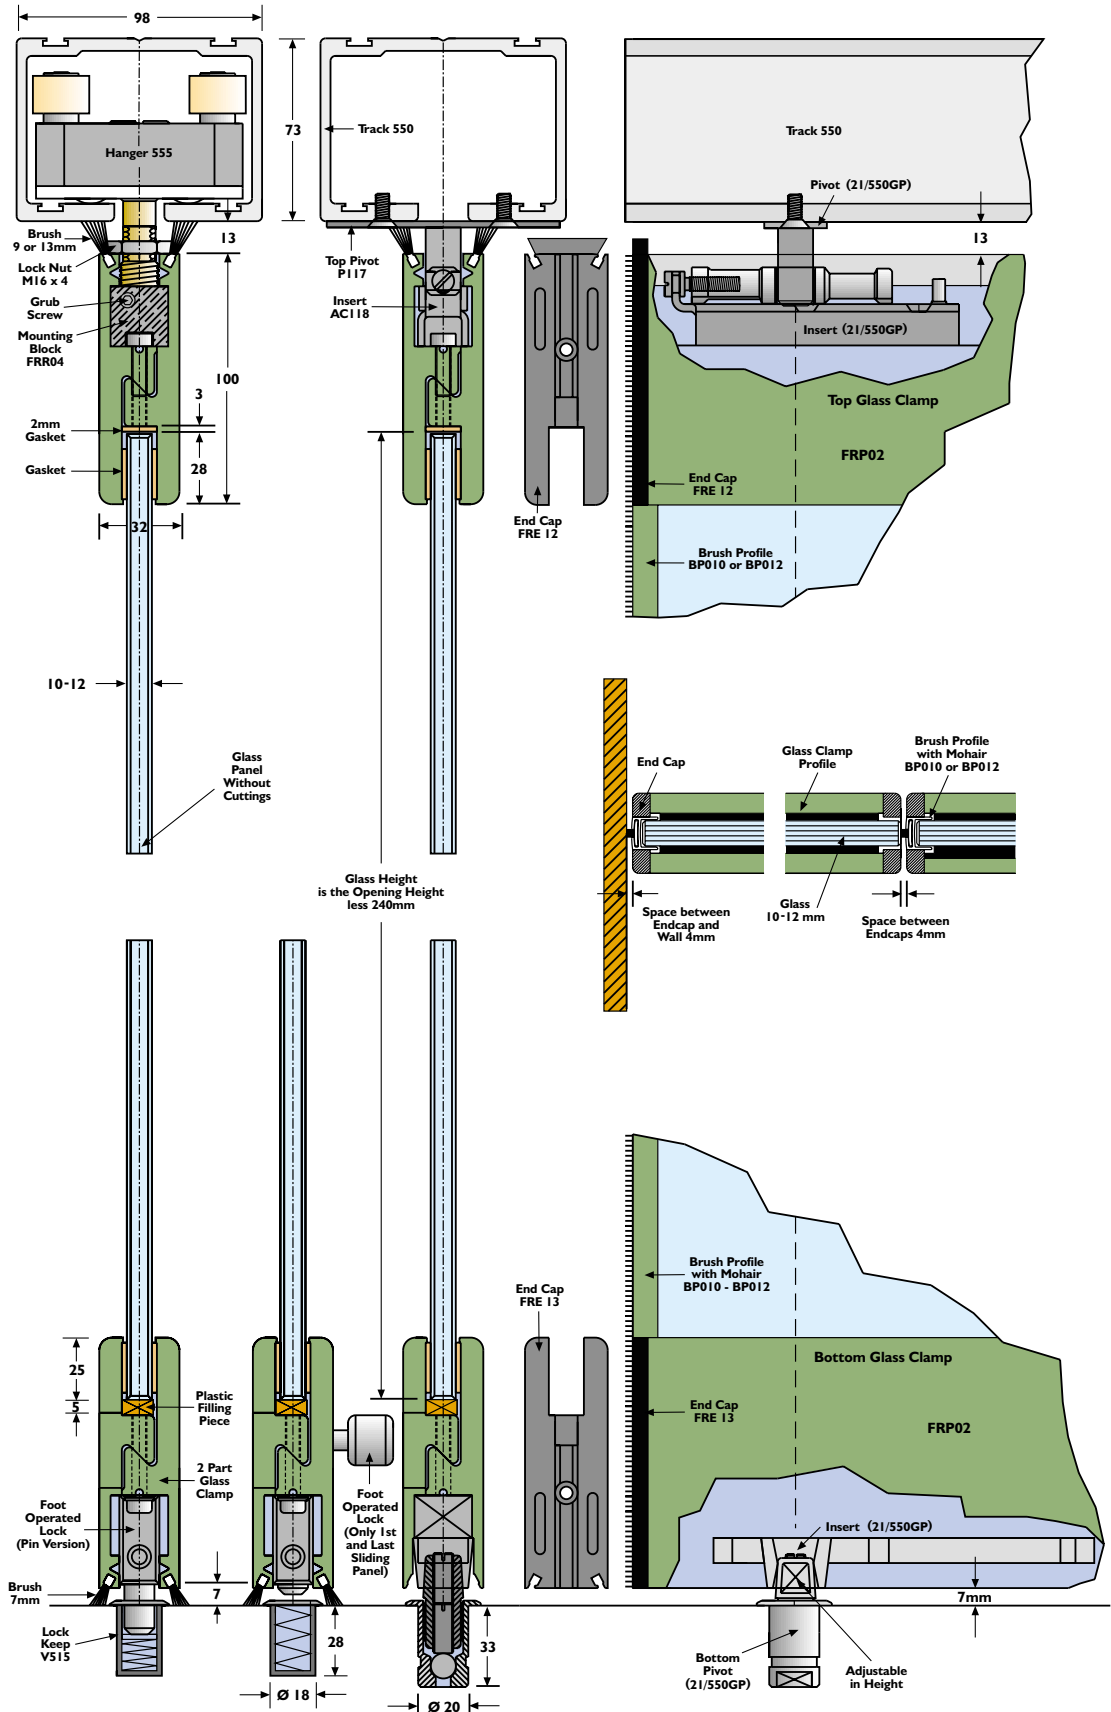

CAPACITY

Max. door weight:	100kg (2 hangers per leaf) 50kg (1 hanger per leaf)
Max. door height:	2800mm-10mm tempered glass 4000mm-12mm tempered glass
Max. door width:	1300mm-10mm tempered glass 1300mm-12mm tempered glass
Panel thickness:	10 or 12mm
Max. swing door width:	1200mm

APPLICATIONS


Lightweight glass partitions for internal and external applications requiring 90° movement.

DOOR TYPES

Tempered glass panels of 10 or 12mm thickness.

Use of laminated glass panels is also possible.


Note: when using glass clamps in combination with protective coatings for glass surfaces such as Clear Shield, ensure that the glass surface to be clamped is not treated with the Clear Shield coating.

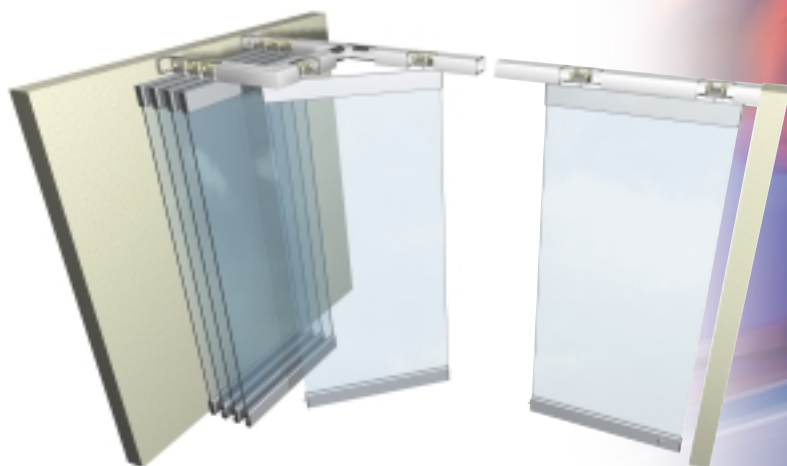

TECHNICAL INFORMATION

Track:	550 (extruded aluminium)	
Brackets:	Face fix Soffit fix	1A/550 3S/550
Hangers:	90° hanger	555
Glass Profiles:	Top/bottom glass profile Swing/slide profile	FRP02 FRP01
Pivots:	Glass pivot set (top & bottom)	21/550GP
Accessories:	Track stop	HH3/301
	Door closers	Floor spring closer 7410 Transom closer 5600 (complete with 400mm of 550 track) Swing/sliding floor spring 7305
	Handle sets	H22/200 D - handle 22mm dia. 200mm long H22/300 D - handle 22mm dia. 300mm long H33/220 D - handle 33mm dia. 220mm long H33/300 D - handle 33mm dia. 300mm long
		(Standard handle set finishes are silver anodised and white RAL9010. Other finishes are available on request.)

90° Configurations

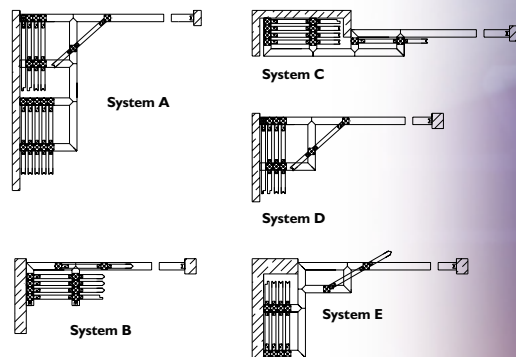

FLEXIROL 90°

MULTIDIRECTIONAL SYSTEM FOR GLASS DOORS

