

STERLING 350

HENDERSON

350kg Wood Metal Interior Exterior

For bottom rolling wooden and metal doors weighing up to 350kg

Overview

Our Sterling range of bottom rolling systems is ideal for heavy commercial and industrial applications such as warehouses, agricultural buildings and aircraft hangars. The product is particularly suitable where the supporting structure or lintel is insufficient for the weight of the door or headroom is limited. Catering for wooden and metal doors weighing up to 350kg, the product is suitable for single or multiple lines of track and the top guide channel may be soffit fixed or face fixed.



Features and Benefits

- Can cover any opening width
- Doors can slide on single or multiple lines of track
- For heavy weight industrial applications
- Top guide channel may be soffit fixed or face fixed

Product and Door Specification

Product	Door Material	Door Thickness Range	Max. Door Weight
Sterling 350	Wood or Metal	44 - 54mm	350kg

Component Specification

Component	Description	Short Code
Top Guide Channel	Galvanised steel channel available in 2000, 2500 and 3000mm lengths	99/****
Brackets (Fix every 900mm max)	Face fixed	31
	Face fixed - double - jointing	35X
	Face fixed - double	35
Top Guide Rollers (2 per door)	Metal door - 12500mm max height	104/99
	Wooden door - saddle fixing	53/99
Bottom Rollers (2 per door, zinc plated and maintenance free, sealed for life roller bearing)	Metal door for standard rail (wheel and bolt only)	1SU
	Metal door for V tread rail (wheel and bolt only)	1SV
	Metal door for square tread rail (wheel and bolt only)	1SL
	Metal door - standard roller	1S
	Wooden door	2
Bottom Rail	Galvanised steel available in 2000, 2500, 3000 and 4000mm lengths	298/****
Stop	Wall mounted stops with double rubber buffer	107

**** Replace by length of track for full short code


If this product is to be installed in areas exposed to extreme heat - we recommend a maximum temperature of 70°C.

Metal Doors




Wooden Doors



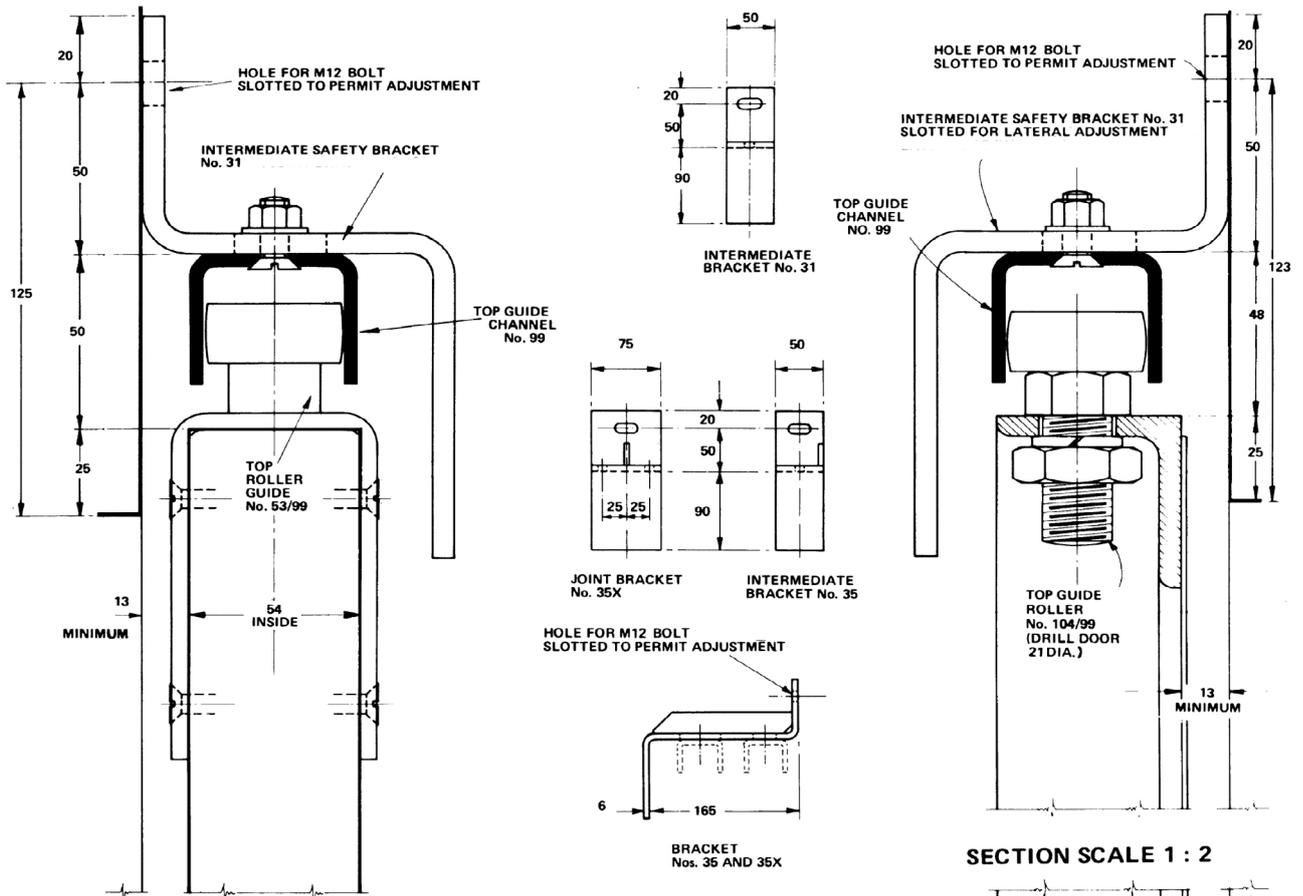

SECTION SCALE 1 : 2

SECTION SCALE 1 : 2

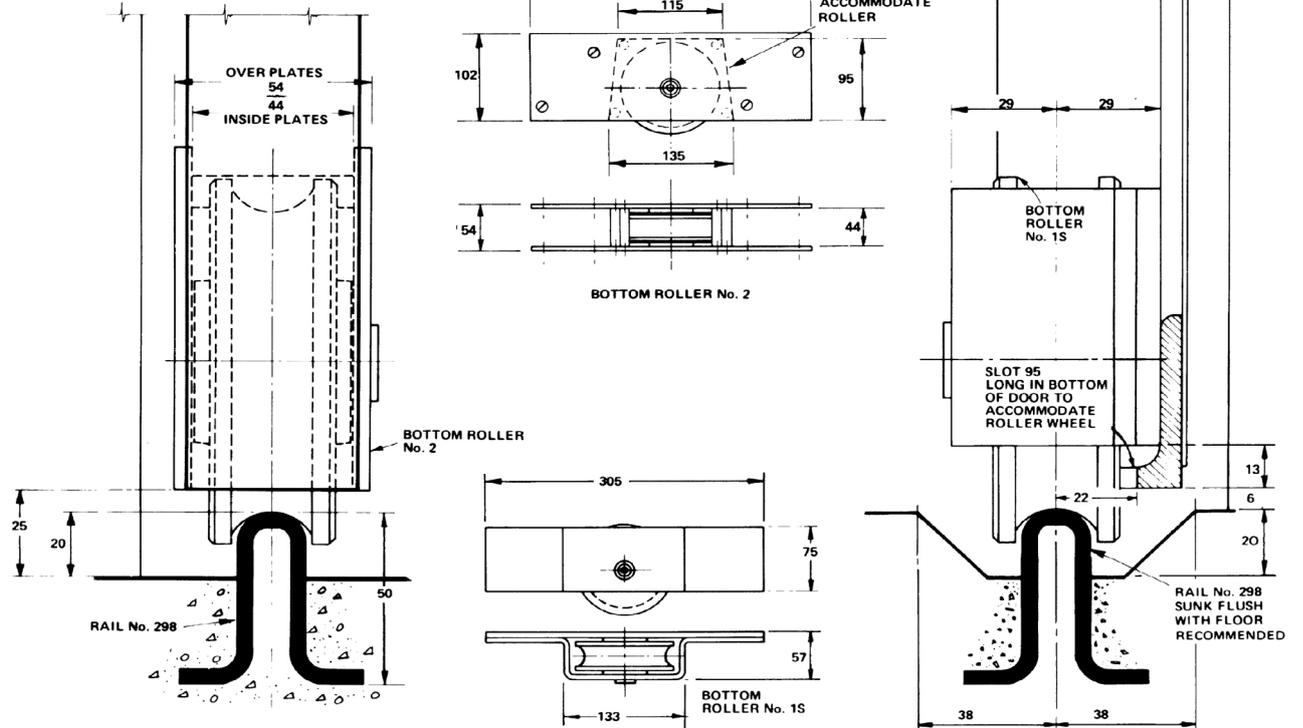

For further information, please contact us on:

UK Sales

T: +44 (0) 191 377 7345

E: sales@pchenderson.com

W: www.pchenderson.com

Export Sales

T: +44 (0) 191 377 7346

E: international@pchenderson.com

W: export.pchenderson.com