

SECUREFOLD BOTTOM ROLLING

80kg

Wood

Interior

Exterior

HENDERSON

Bottom rolling system for folding wooden doors weighing up to 80kg

Overview

Utilising bottom rolling technology, our Securefold Bottom Rolling hardware carries the weight of the door at the bottom of the system. This allows the system to be installed into virtually any space without the need for major structural support.

Typically used in orangeries, conservatories, out buildings and extensions, Securefold Bottom Rolling can allow you to open up any property to the outside world.

The system is available in four stunning finishes, a range of hinge options and both locking and non locking versions to help cater for even the most bespoke projects.

Enhance the system even further with our Twinbolt locking system. One simple turn of a handle engages a 22mm throw to securely lock the doors at the top and bottom of the system.

Features and Benefits

- Extremely weather and corrosion resistant with all components made from 316 stainless steel
- Available in four stunning finishes - satin, black, gold and chrome
- Available with Twinbolt - a locking system which provides two points of locking using top and bottom throw rods



Product Information

Product	Max. Door Height	Max. Door Width	Door Thickness Range	Max. Door Weight
Securefold Bottom Rolling	3000mm	1000mm	56 - 68mm	80kg

Product Specification

Component	Description	Mortice	Non Mortice
Track	Anodised aluminium track - 3000, 4000 and 6000mm lengths	242/****	
Pivot	Pivot assembly	SFBR1#	SFWBR1#
Hangers	End hanger set	SFBR2#	SFWBR2#
	Intermediate roller set kit	SFBR4#	SFWBR4#
Hinges	Hinge handle set inward opening	SF3#	
	Hinge handle offset outward opening	SF7#	
	Intermediate pivot hinge	SF9#	
Meeting Kit	Meeting kit	SFBR8#	SFWBR8#
Channel	Polypropylene channel in black - 3000, 4000 and 6000mm lengths	94P/****	
	Anodised aluminium support channel - 3000, 4000 and 6000mm lengths	94SC/****	
Seals	Door perimeter seal in brown or white	AQ63B or AQ63W	
	Frame perimeter seal in brown or white	AQ21B or AQ21W	
	Track seal in black	BS10B	
Flush Bolts - Non Locking	For outward opening - 190, 450 or 600mm lengths	SF190# / SF450# / SF600#	
Flush Bolts - Locking	For outward opening - 190, 450 or 600mm lengths	SF190L# / SF450L# / SF600L#*	




**** Replace with length of track for full short code

Replace with first letter of colour - satin, gold, chrome or black

* SF600L is only available in satin and black

Twinbolt Specification - Alternative locking system to flush bolts

Component	Description	Mortice	Non Mortice
Twinbolt	Locking system for Securefold	TB/SFBR	TB/SFBR
Twinbolt Handle	Handle for Twinbolt	TWINHAN/S	
Routing Cover Strip	Available in brown, black or white	TBCS/BR or TBCS/BL or TBCS/WH	

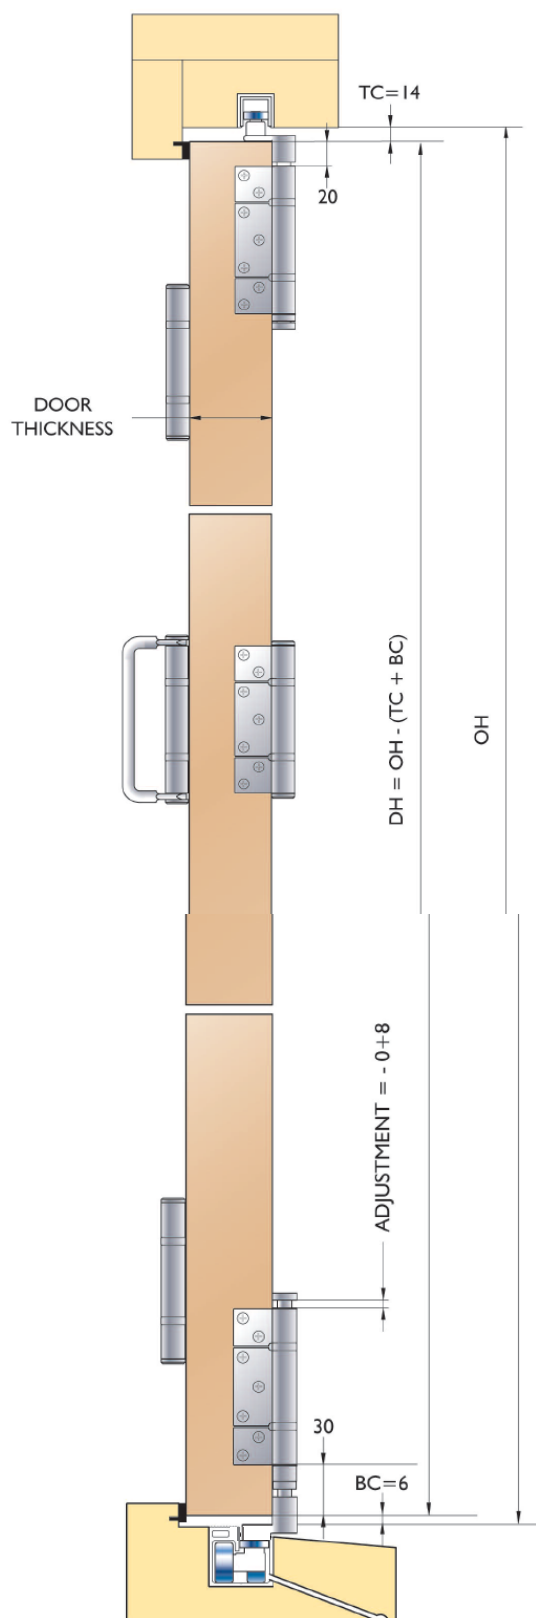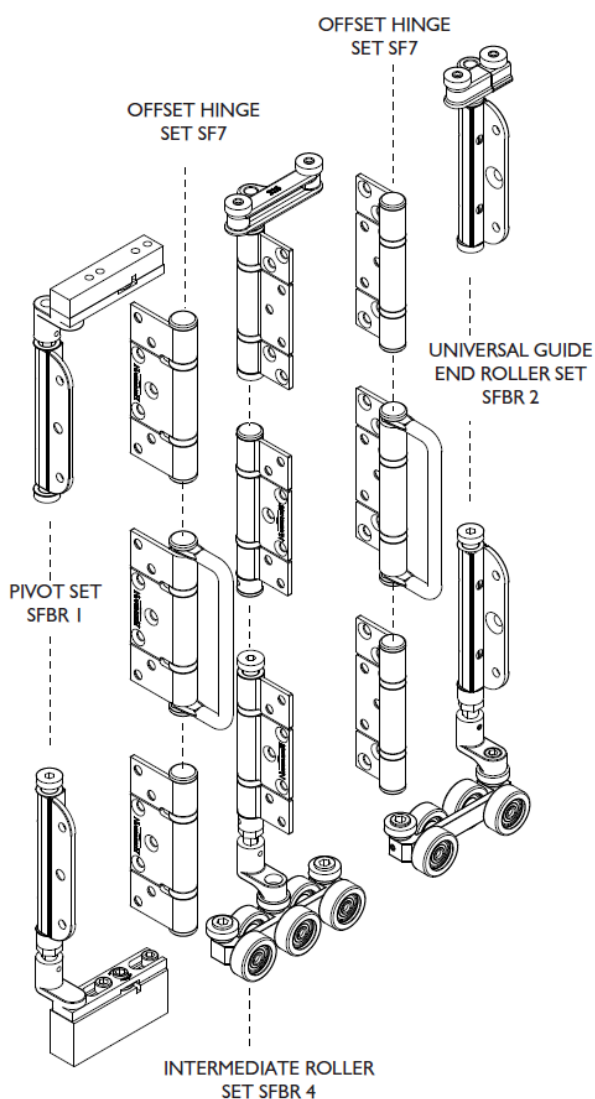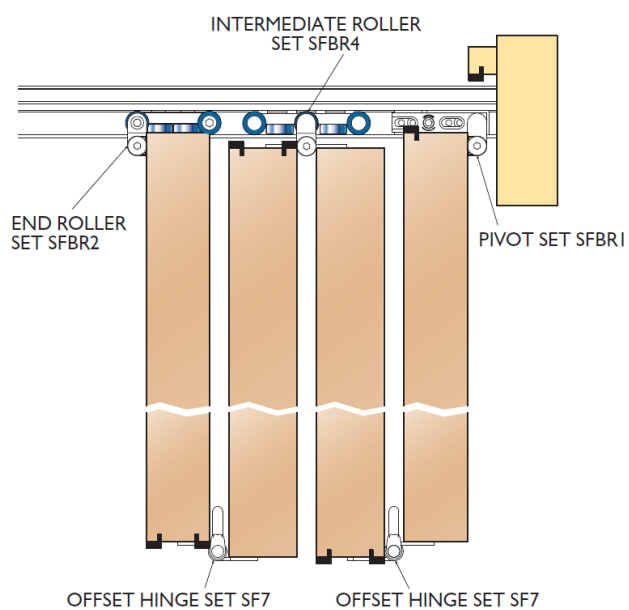

For further information, please contact us on:

UK Sales

T: +44 (0) 191 377 7345

E: sales@pchenderson.com

W: www.pchenderson.com

Export Sales

T: +44 (0) 191 377 7346

E: international@pchenderson.com

W: export.pchenderson.com