

# STRAIGHT SLIDING 307 HENDERSON

2000kg Wood Metal Exterior

For sliding wooden and metal doors weighing up to 2000kg

## Overview

Catering for wooden and metal doors, Straight Sliding 307 allows for the easy movement of anything from light commercial doors up to very heavy and large industrial applications. To cover any opening width, any number of doors can be used on single or double runs of track. With a range of components to choose from, Straight Sliding 307 can be specified to meet the your exact requirements.

## Features and Benefits

- Widely used in lighter commercial applications up to very heavy and large industrial applications
- Can cover any width of opening, any number of doors can be used on single or multiple lines of track
- Designed to accommodate for different building designs, doors can slide to one or both sides
- Wicket door for easy access may be incorporated into a sliding door



| Product and Door Specification |                      |                  |
|--------------------------------|----------------------|------------------|
| Product                        | Door Thickness Range | Max. Door Weight |
| Straight Sliding 307           | 60 - 70mm            | 2000kg           |


| Component Specification  |  |                         |
|--|--|-------------------------|
| Component  | Description  | Short Code              |
| Track<br>(Twice the width of doors)  | Galvanised steel track in 2000, 2500, 3000 and 4000mm lengths  | 307/****<br>(5mm thick) |
|  |  |                         |
| Steel Brackets<br>(900mm max spacing and at track joints)<br>** RC for right hand closing and LC for left hand closing | Face fixed - single  | 1/307S                  |
|  | Face fixed - single - jointing                                 | 1X/307S                 |
|  | Face fixed - single - low headroom                             | 9/307S                  |
|  | Face fixed - single - closed end bracket                       | 1/307S**                |
|  | Face fixed - double - adjustable for one track                 | 5/307S                  |
|  | Face fixed - double - closed end bracket                       | 5/307SC                 |
|  | Soffit fixed - single  | 3/307S                  |
|  | Soffit fixed - single - 'in line'                              | 4/307S                  |
|  | Soffit fixed - single - adjustable                             | 4R/307S                 |
|  | Soffit fixed - single - adjustable                             | 4RX/307S                |
|  | Soffit fixed - single - bolt on (closed)                       | 4R/307SC                |
|  | Soffit fixed - single - closed end bracket                     | 3/307SC                 |
|  | Soffit fixed - soffit 'in line' - closed end bracket           | 4/307SC                 |
|  | Soffit fixed bracket body (for welding)                        | 4R/305SB                |
| Hanger<br>(2 per door)   | Metal door - 4 wheel - standard bolt                           | 56FJ/S                  |
|  | Metal door - extended bolt                                     | 56FJX/S                 |
|  | Wood door - 4 wheel - side plate                               | 53FJ/S                  |
| Guides*  | Metal door   | 104P/97                 |
|  | Metal door - extended  | 104PX/97                |
|  | Wood door - side fixed   | 105R/97                 |
|  | Wood door - concealed  | 106R/97                 |
|  | Metal or wood door - stop guide                                | 112                     |
|  | Metal or wood door - ground stay roller                        | 126                     |
|  | Metal or wood door - heavy duty ground stay roller (assembled) | 126HD/A                 |
|  | Metal or wood door - heavy duty ground stay roller             | 126H                    |
|  | Metal or wood door - heavy duty extended ground stay roller    | 126HL                   |
|  | Metal or wood door - shoe guide                                | 128                     |
|  | Metal or wood door - wall mounted, for single doors            | 31S                     |
|  | Metal or wood door - wall mounted, for double doors            | 31D                     |
|  |  |                         |

|                                       |   |          |
|---------------------------------------|---|----------|
| Guide Channel<br>Same length as track | Galvanised steel channel in 2000, 2500, 3000, 4000 and 6000mm lengths | 97/****  |
|                                       | Shallow steel channel in 2000, 2500, 3000 and 4000mm lengths          | 100/**** |
|                                       | Bottom rail in 2000, 2500 and 3000mm lengths                          | 299/**** |

\*\*\*\* Replace with required length for full short code


\*All channels supplied with lugs and couplers included expect 94 and 94X

## For Wooden Doors

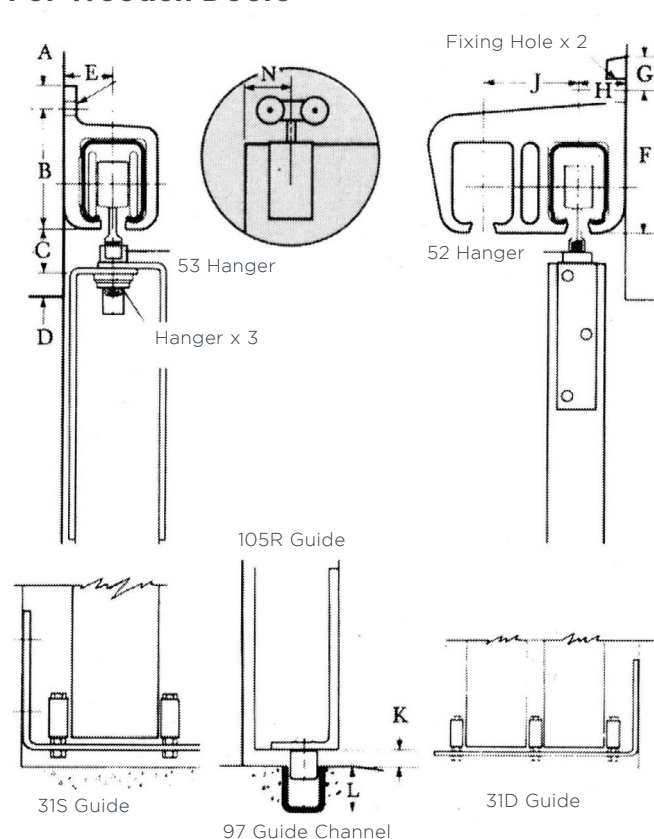

| System               | A  | B   | C  | D  | E  | F   | G  | H  | J  | K  | L  |
|----------------------|----|-----|----|----|----|-----|----|----|----|----|----|
| Straight Sliding 305 | 25 | 140 | 50 | 25 | 38 | 155 | 38 | 48 | 92 | 13 | 38 |

## For Metal Doors

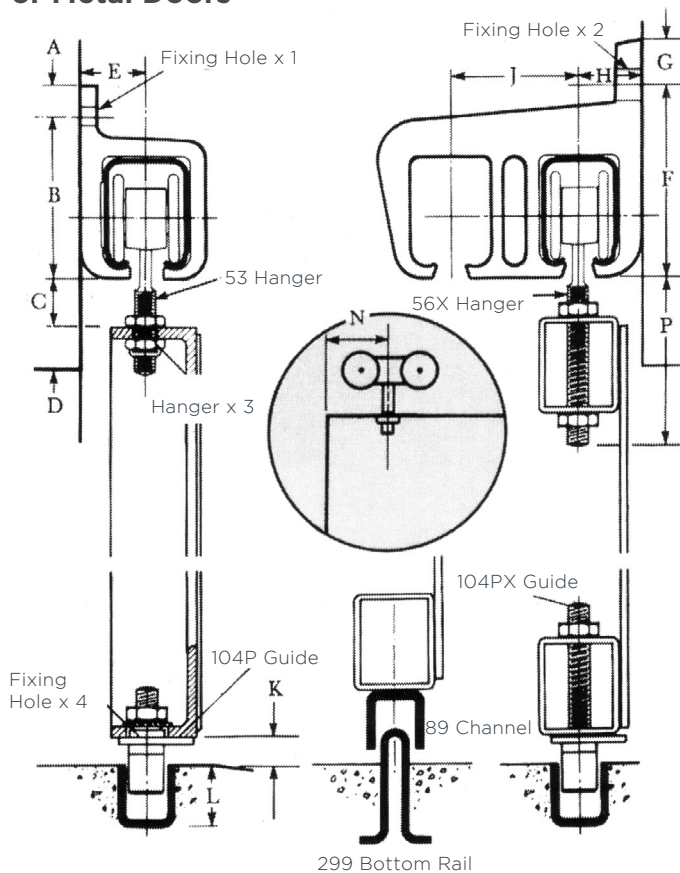

| System               | A  | B   | C  | D  | E  | F   | G  | H  | J  | K  | L  | P   |
|----------------------|----|-----|----|----|----|-----|----|----|----|----|----|-----|
| Straight Sliding 305 | 20 | 140 | 50 | 25 | 38 | 155 | 38 | 48 | 92 | 13 | 38 | 140 |

For further information, please contact us on:

### UK Sales

T: +44 (0) 191 377 7345

E: [sales@pchenderson.com](mailto:sales@pchenderson.com)

W: [www.pchenderson.com](http://www.pchenderson.com)

### Export Sales

T: +44 (0) 191 377 7346

E: [international@pchenderson.com](mailto:international@pchenderson.com)

W: [export.pchenderson.com](http://export.pchenderson.com)