

# IMPERIAL SPECIFIED

Bottom rolling hardware system for external sliding patio doors weighing up to 200kg.



## Features & Benefits

- Bottom rolling sliding door hardware system suitable for wooden doors weighing up to 100kg and 200kg.
- Ideally suited to external sliding patio door applications.
- Allows the weight of the door to be taken by the floor, making the system ideal for applications whereby there is insufficient structural support.
- Components are specified individually to allow for doors to run on multiple lines of track - with multiple top guide channel, hanger and guide options to choose from.
- Imperial is also available in kit pack format for single sliding, bi-parting or bypassing door applications.

## Product Information

Product	Max. Door Width	Door Thickness Range	Max. Door Weight
Imperial	3000mm	40 - 56mm	100kg / 200kg

**P C Henderson Ltd**  
Durham Road, Bowburn,  
County Durham,  
DH6 5NG

**UK SALES**  
**T:** +44 (0) 191 377 7345  
**E:** sales@pchenderson.com  
**W:** www.pchenderson.com


**HENDERSON**

## Product Specification

Component	Description	Product Code
Top Guide Channel	Aluminium channel - 1500, 2000, 2500, 3000, 4000 and 6000mm	94X/****
	Polypropylene channel - 2000, 2500, 3000, 3500, 4000, 5000 and 6000mm	94P/****
	Anod. alum. support channel - 2000, 2500, 3000, 3500, 4000, 5000 and 6000mm	94SC/****
	Stainless steel guide channel - 2000 and 3000mm	89/****SS
	Aluminium channel with safety lip - 2000, 2500, 3000, 4000 and 6000mm	900AN/****
Top Guide Rollers	Top plate fitting top guide	106HSS/94
	Corner fixing top guide	113SS/94
	Torpedo HDPE fitting top guide	89/2N/SS
Bottom Rail	Aluminium mill finish (for doors weighing up to 100kg) - 1500, 2000, 2500, 3000, 4000 and 6000mm	915A/****
	Bronze bottom rail (for doors weighing up to 200kg) - 2000, 2500, 3000, 4000 and 6000mm	915B/****
Bottom Rollers	Nylon bottom roller (for doors weighing up to 100kg)	100N
	Stainless steel bottom roller (for doors weighing up to 200kg)	200SS
Brackets	Stainless steel face fixed brackets (for use with 900AN top guide channel)	1/SS
Interlocking Profile	Interlocking profile - 2400mm	INTPROF/24
Stops	Floor stop	DS200/SS
Seals	Door perimeter - brown or white	AQ63B or AQ63W
	Frame perimeter - brown or white	AQ21B or AQ21W

\*\*\*\* Replace with length for full short code

## Product Diagrams

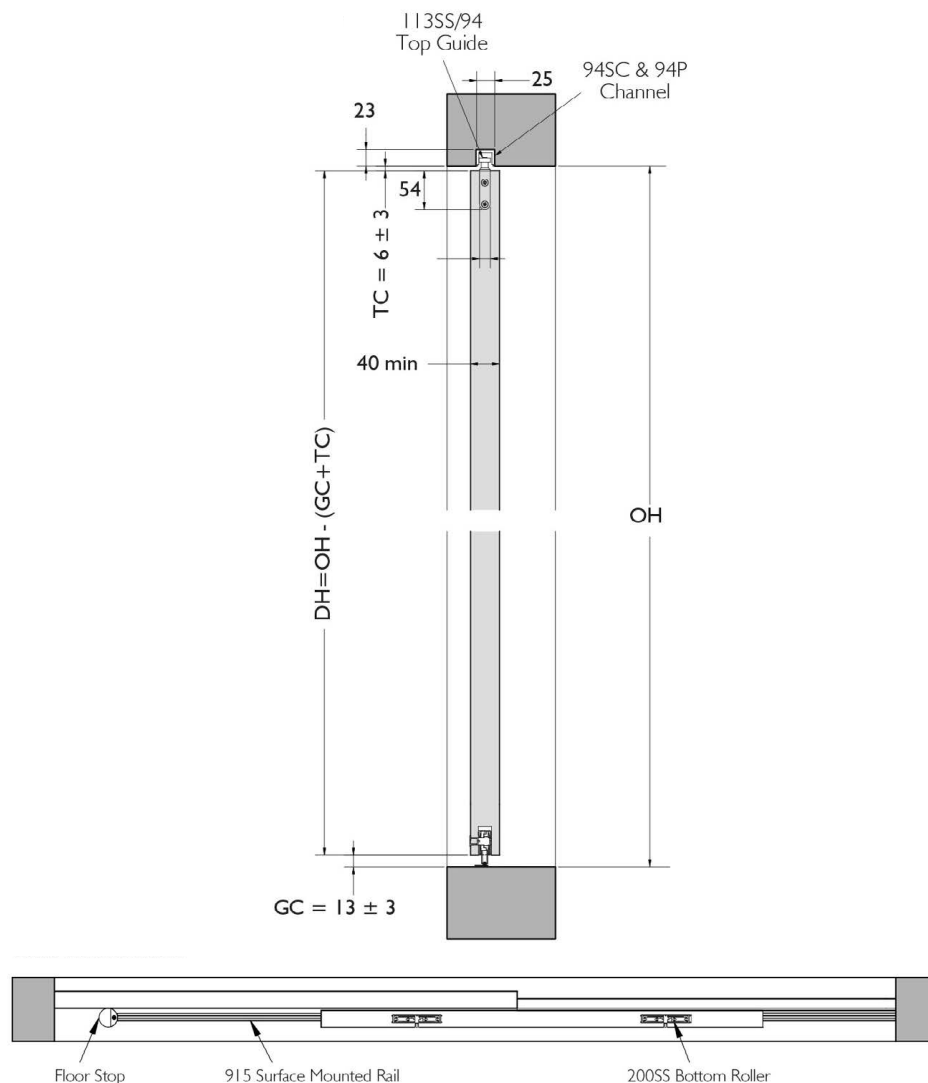

# IMPERIAL

## THE BENEFITS

### FLEXIBLE FIXING OPTIONS

Available for soffit fixed or face fixed applications.




### INTERLOCKING PROFILE

For enhanced weather resistance by forming a tight water resistant seal.



### TOP GUIDE CHANNEL OPTIONS

Choose between our various guide channels in aluminium and stainless steel.



### BOTTOM ROLLER OPTIONS

Choose between our nylon bottom roller for doors weighing up to 100kg and our stainless steel roller for doors up to 200kg.



### BOTTOM RAIL

Pair our 100kg bottom roller with our aluminium bottom rail for a smooth operation. For 200kg doors, pair our 200SS bottom roller with our bronze bottom rail.