

# FLEXIROL SLIDING GLASS

For sliding glass doors weighing up to 500kg



Flexirol Sliding Glass is a unique system ideally suited to large doors that require high performance as well as an attractive finish. It's an ideal product for hotels, offices, conference centres, shop fronts and showrooms where durability and design are paramount.


## Product Information

Product	Glass Thickness	Max. Door Weight
Flexirol Sliding Glass	10mm or 12mm	500kg (100kg per metre of claming)

## Product Specification

Component	Description	Short Code
Track	White aluminium track in 2000, 2500, 3000, 4000, 5000 and 6000mm lengths	550/****
	Mill finish track in 2000, 3000, 4000, 5000 and 6000mm lengths	550/****M
Brackets Spaced every 750mm	Face fixed bracket	1A/550
	Suspended soffit fixed ceiling bracket with vertical adjustment	3S/550
Hangers 2 per door	Hanger with mounting block	556S
Glass Profile	Made to measure, contact P C Henderson for more information	FRP02
Guide 2 per door	Guide with mounting block	FRPN/94
Guide Channel	Brass guide channel in 1500 and 3000mm lengths	94/****
	Aluminium guide channel in 1500, 2000, 2500, 3000, 4000 and 6000mm lengths	94X/****
	Aluminium threshold guide channel in 2000, 2500, 3000, 3500, 4000 and 6000mm lengths	94T/****
Stop 2 per door	Track stop	HH3/301

\*\*\*\*Replace with length of track or rail for full short code

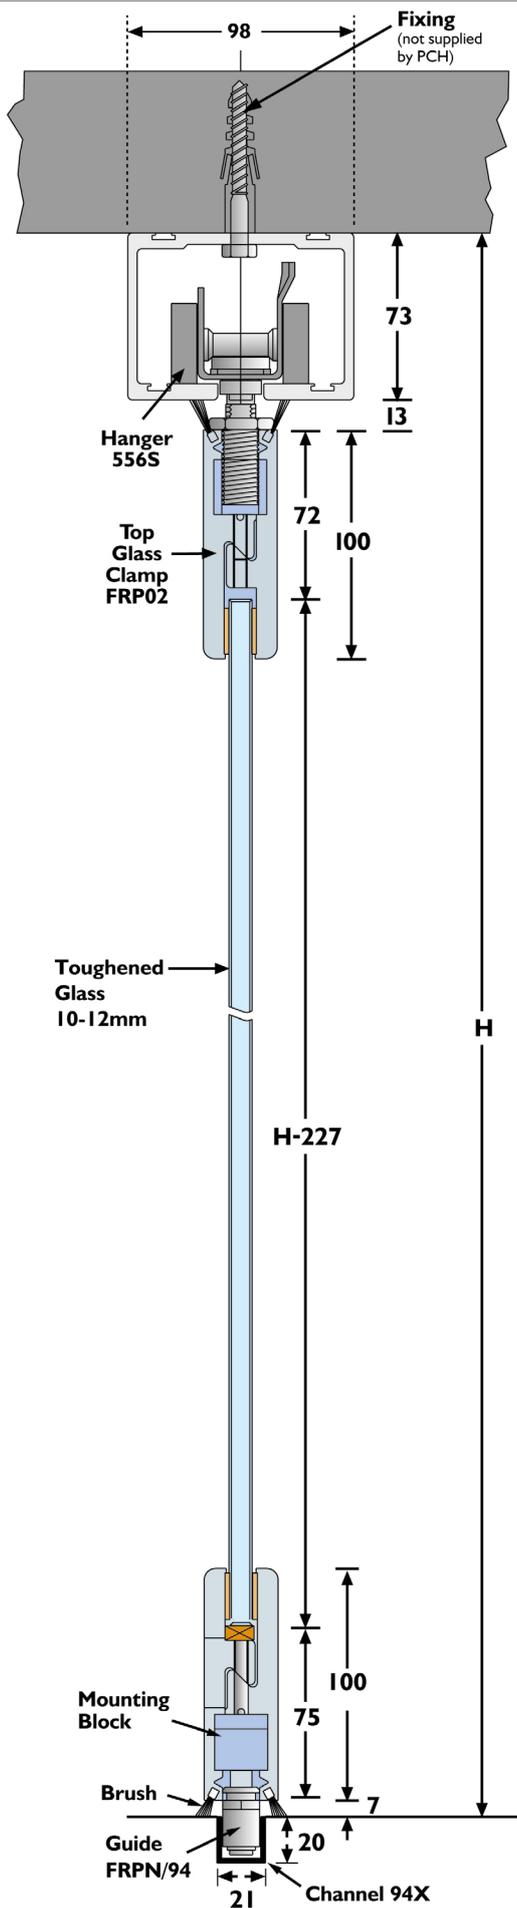

Hardware

Track



550



550M

Brackets



1A/550



3S/550

Hangers



556S

Glass Profile



FRP02

Guide



FRPN/94

Guide Channel



94



94X



94T

Stop



HH3

Accessories

View our full range of accessories on page 136