

SECUREFOLD BOTTOM ROLLING

MAXIMUM DOOR WEIGHT 80kg EACH

Enables folding doors to be installed into any space without major structural building support.
Easy installation and smooth operation which can be adjusted both vertically & laterally within the framework

APPLICATIONS

- ▶ Residential and commercial timber exterior folding applications.
- ▶ Especially suited to coastal environments with all components made from 316 stainless steel, anodised aluminium or engineering polymers.
- ▶ End folding timber doors folding to one or both sides.
- ▶ Standard folding configuration features doors folding outward.
- ▶ Available in Brushed Satin, Polished Chrome, PVD Black and Gold

DOOR SPECIFICATION

For individual door leaves:

Maximum Leaf Height	3000mm
Maximum Leaf Weight	80kg
Maximum leaf width	1000mm
Maximum leaf thickness	68mm*
Minimum Leaf thickness	56mm*

GEAR SPECIFICATION

Track:	242 anodised aluminium (anodised 25 microns) Lengths to suit 3, 4 & 6 metre lengths
Hanger/Hinge/Guide sets:	SFBR1 pivot set SFBR2 end hanger/guide SF3 hinge set with handle SFBR4 intermediate hanger/hinge/guide set SF7 hinge set offset outward opening SFBR8 rebated end hanger/guide set** SF9 intermediate pivot hinge for doors above 2200mm SF10 face fix handle (optional) Hinge options - Standard, Non Morticed, Radius Morticed, and Square Morticed. See website for details
Channel:	94P polypropylene guide channel 94SC anodised aluminium support channel channel lengths correspond with standard track lengths
Seals:	AQ63B door perimeter seal brown AQ21B frame perimeter seal brown BS10 track seal black
Accessories:	Non Lockable flush bolts are available in satin finish only.

* For thicker / Thinner door please contact PC Henderson Technical department

**End hanger set for a pair of meeting doors


FOR SLIDING TIMBER DOORS



(Standard hinge option shown)

SECUREFOLD BOTTOM ROLLING

FOR SLIDING TIMBER DOORS WITH A MAXIMUM DOOR WEIGHT OF 80kg EACH

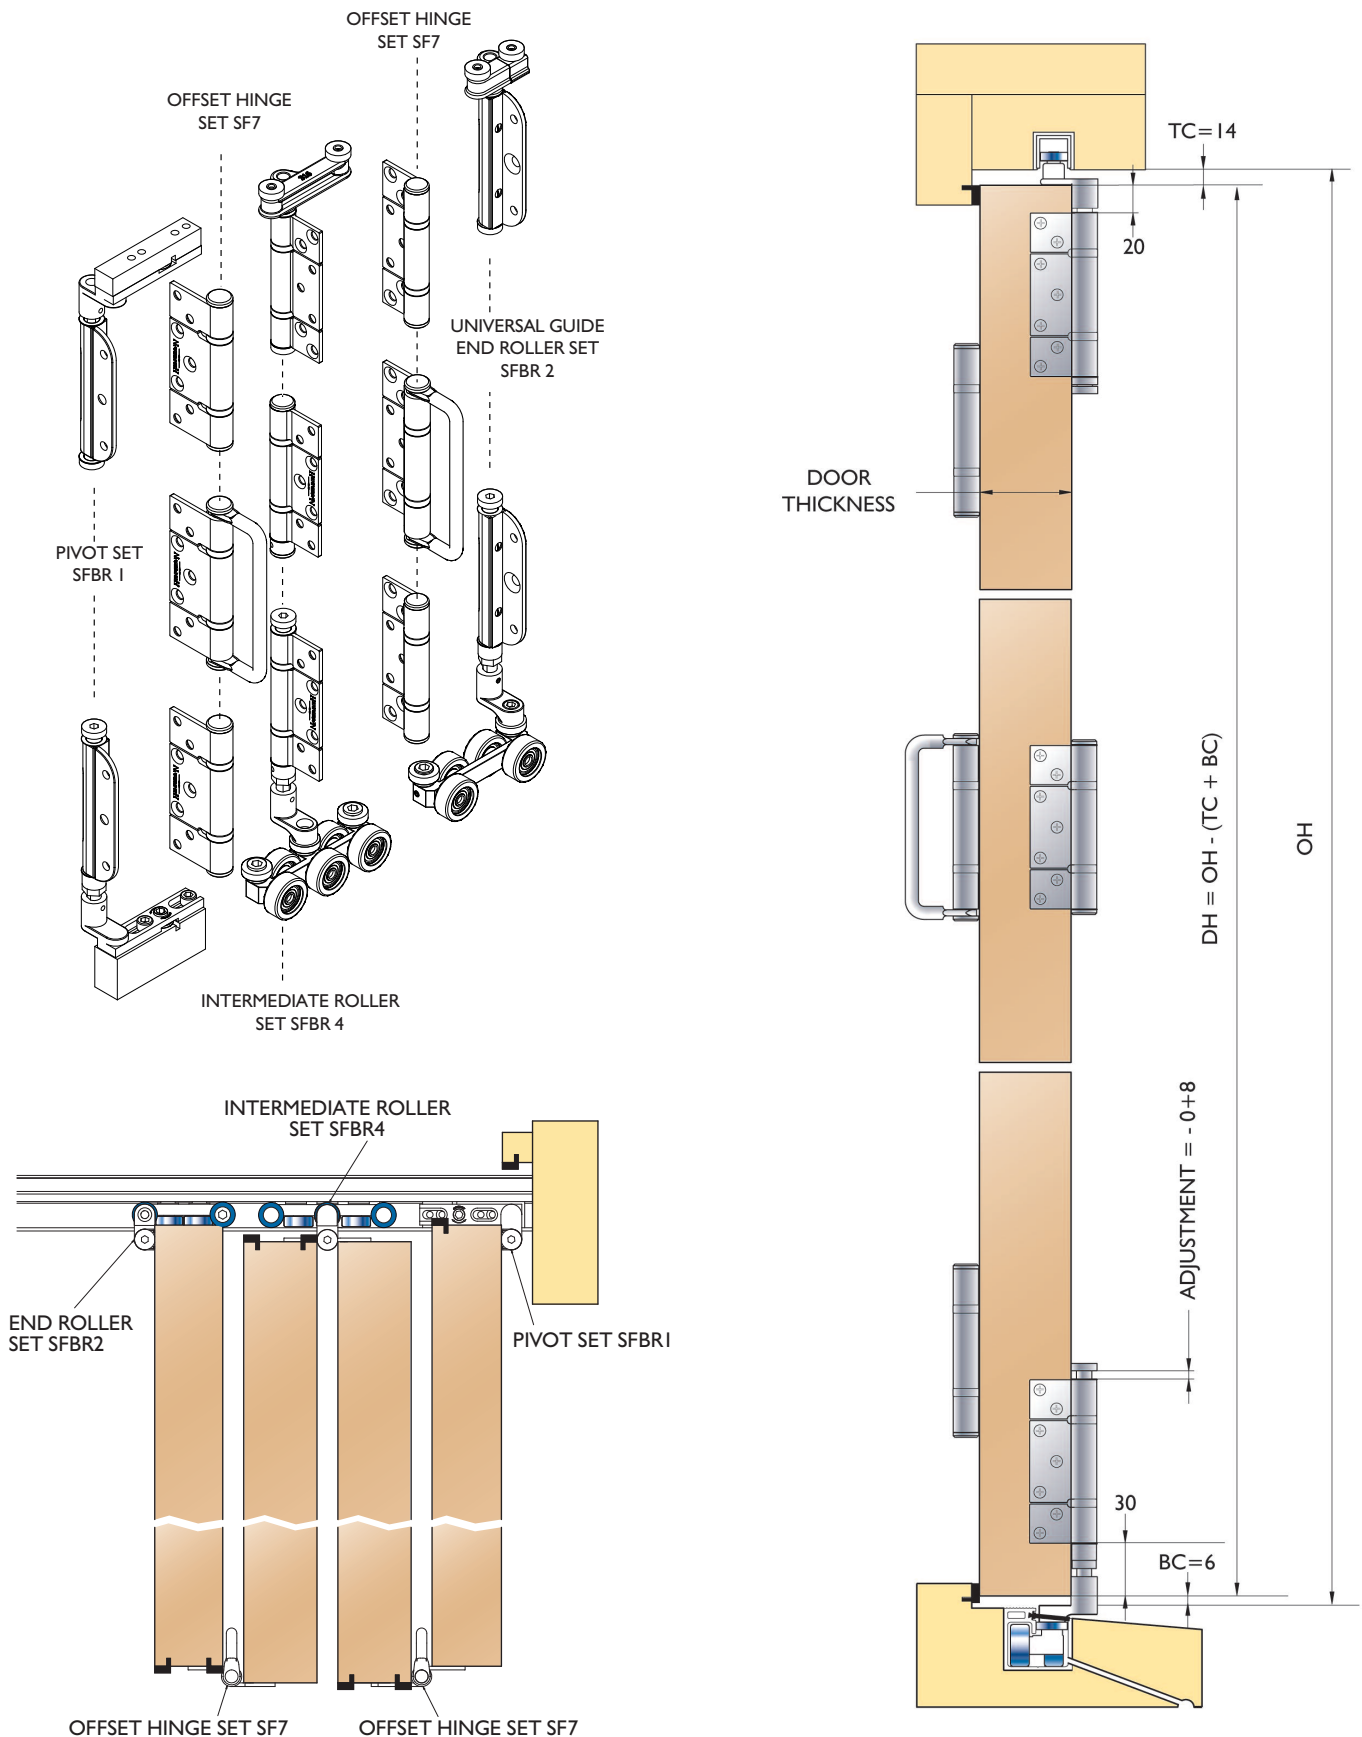

HENDERSON

P C Henderson Limited, Durham Road, Bowburn, County Durham DH6 5NG, UK. Web: www.pchenderson.com
 UK Customer Services Department: Tel: + 44 (0)191 377 7345 Fax: + 44 (0)191 377 3116 Email: sales@pchenderson.com
 Export Department: Tel: + 44 (0)191 377 7346 Fax: + 44 (0)191 377 0755 Email: international@pchenderson.com
 For all technical queries email our Technical Department: technical@pchenderson.com