

# SHUTTER SLIDE

# HENDERSON

120kg

Wood

Metal

Exterior

Straight sliding hardware for the movement of manual and automatic louvre panels

## Overview

Shutter Slide is a high performing straight sliding louvre system suitable for residential and commercial applications. The highly flexible system can cater for wooden and metal external louvre panels weighing up to 120kg.

Offering a variety of inspiring and functional design possibilities, the system is available in single panel, simultaneous panel or telescopic panel variants. All systems are available in either manual or automatic operation

## Features and Benefits

- For wooden and metal louvre panels weighing up to 120kg
- Single panel, simultaneous action or telescopic variants
- Manual or automatic operation
- Manufactured using marine grade 316 stainless steel, hard wearing polymers and anodised aluminium
- Highly corrosion resistant - ensuring a long lifespan
- Low voltage energy efficient motors in 24V or 230V variants



## Product Information

Configuration	Min. Panel Width	Max. Panel Height	Panel Thickness Range	Max. System Width	Max. Panel Weight	
					Manual	Automated
Single Panel	400mm	3000mm	35 - 48mm	6000mm	120kg	120kg
Bi-Parting Panels (SIM Action)	400mm	3000mm	35 - 48mm	6000mm	120kg	60kg
Telescopic (2 panels)	400mm	3000mm	35 - 48mm	6000mm	120kg	80kg
Telescopic (3 panels)	400mm	3000mm	35 - 48mm	6000mm	120kg	60kg

For bespoke systems which do not meet the above criteria, please contact P C Henderson


## Product Specification

Component	Description	Single Run	Double Run	Triple Run
Track	Anodised aluminium track in 2000, 2500, 3000, 3500, 4000, 5000 & 6000mm	120/****	120/****	120/****
Hanger	Top fixed, surface mounted hanger for wooden and metal louvres	51/120/SS	51/120/SS	51/120/SS
	Angle frame hanger for metal louvre doors	56/120/SS	56/120/SS	56/120/SS
Wall Fixing Profile	Wall fixing profile in 2000, 3000, 4000, & 6000mm	WP50T/****	WP100T/****	WP150T/****
Fascia and Endcaps	Fascia for wall fixing profile in 2000, 3000, 4000 & 6000mm	WP50F/****	WP100F/****	WP150F/****
	Endcaps for fascia	WP50/EC	WP100/EC	WP150/EC
Telescopic Set	Telescopic set for two or three panels	-	E/TEL2	E/TEL3
Channels	U profile channel with gasket in 2000, 3000, 4000 & 6000mm	GSSUR/****	GSSUR/****	GSSUR/****
	U profile channel with L channel and gasket in 2000, 3000, 4000 & 6000mm	GSSULR/****	GSSULR/****	GSSULR/****
Fixing Plates	L plate available in 40, 60 and 100mm lengths	GSS/MK**	GSS/MK**	GSS/MK**
	Offset angle plate - left hand - 100mm length (can be cut down to length)	GSS/LH	GSS/LH	GSS/LH
	Offset angle plate - right hand - 100mm length (can be cut down to length)	GSS/RH	GSS/RH	GSS/RH
Guides	Guide to be used with GSS/MK L plate - wide base (10mm depth)	GSS/SBK10	GSS/SBK10	GSS/SBK10
	Guide to be used with GSS/MK L plate - narrow base (10mm depth)	GSS/SSK10	GSS/SSK10	GSS/SSK10
	Black nylon guide, can be floor mounted or panel mounted (4mm depth)	GSS/SL	GSS/SL	GSS/SL
Stop	Track stop - anodised aluminium	HH4/AN	HH4/AN	HH4/AN
Motor (Can carry up to 3 shutters in one direction)	24V motor with two wall mounted control panels	E120/24V	E120/24V	E120/24V
	230V motor - control panel built within motor	E120/230V	E120/230V	E120/230V
Belt, Clamp and Pulley (Must be specified when automation or SIM action is required)	Belt - 10mm (per metre, specify double the length of track, plus 1 metre)	E/B10	E/B10	E/B10
	Clamp - 10mm	E/CL10	E/CL10	E/CL10
	Pulley wheel	E/PA10	E/PA10	E/PA10
Accessories	Remote control kit (for use with 24V motor only)	E2/RCK	E2/RCK	E2/RCK


\*\*\*\* Replace with required length for full short code

\*\* Replace with required length for full short code



## Single Panel

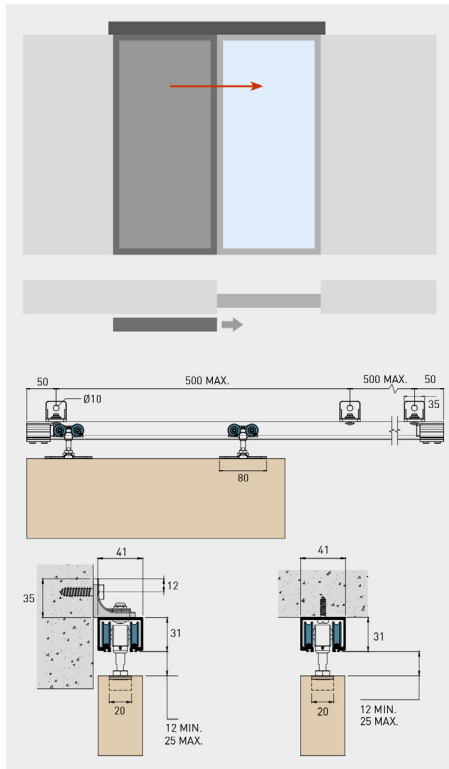

## Simultaneous Action Panel

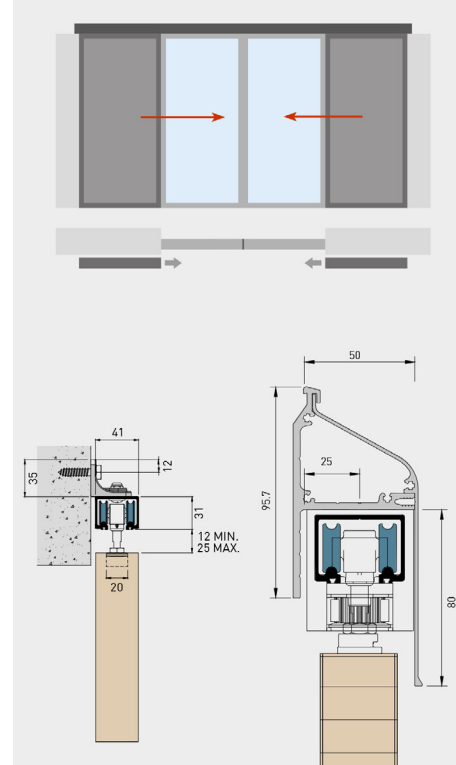

## Telescopic Panel

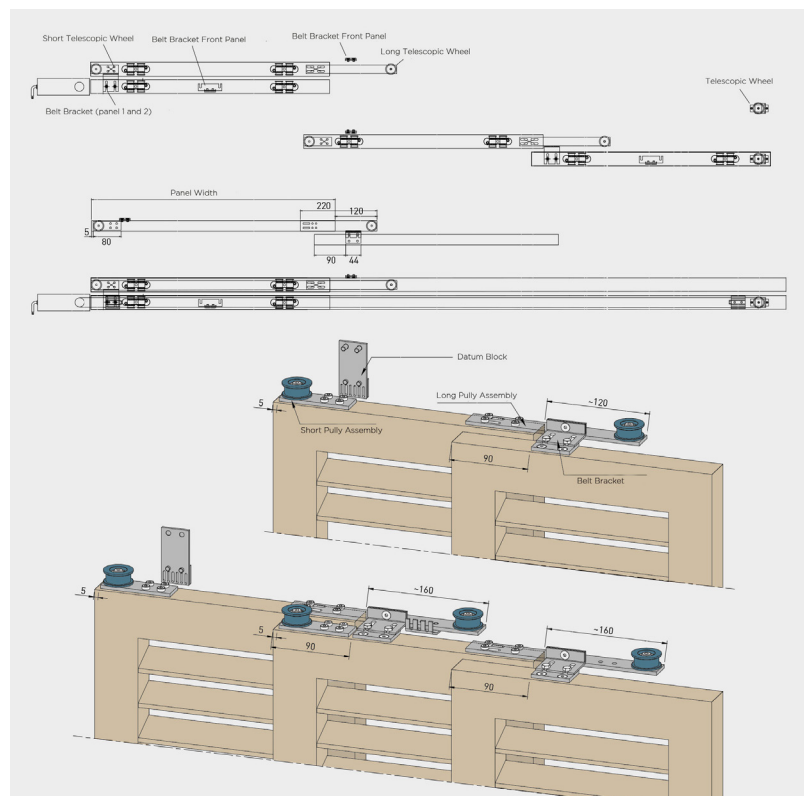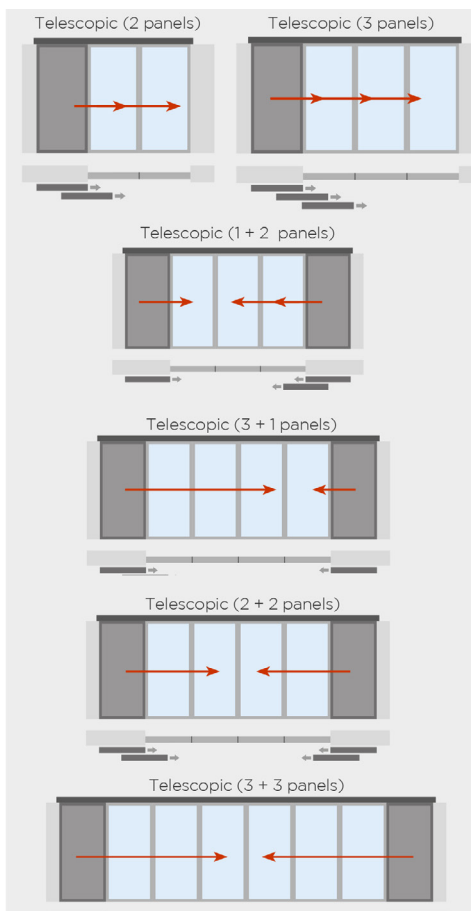

For further information, please contact us on:

### UK Sales

T: +44 (0) 191 377 7345

E: [sales@pchenderson.com](mailto:sales@pchenderson.com)

W: [www.pchenderson.com](http://www.pchenderson.com)

### Export Sales

T: +44 (0) 191 377 7346

E: [international@pchenderson.com](mailto:international@pchenderson.com)

W: [export.pchenderson.com](http://export.pchenderson.com)